
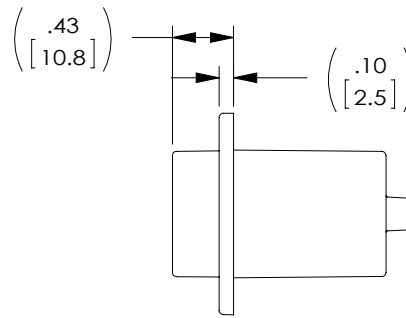
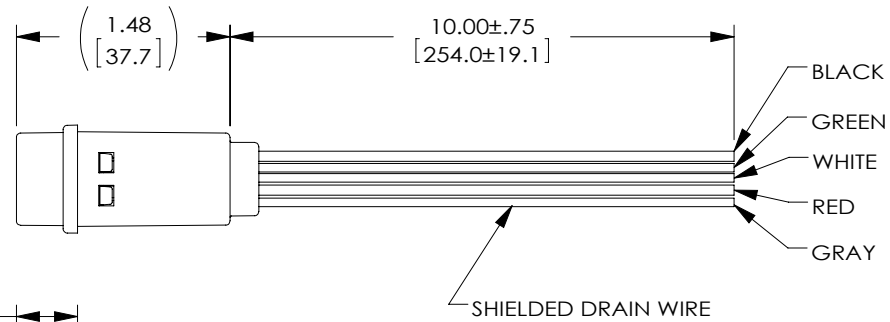


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
F	ECN 5200: CN RELEASE	12/9/10	D. CASTRO
G	ECN 6692: REVISED MODEL TO SNAP-ON COVERS	2/20/13	D. FRISIELLO
H	ECN 8409: UPDATE TEMPERATURE RATING TO -10-70°C	7/18/16	S.LI

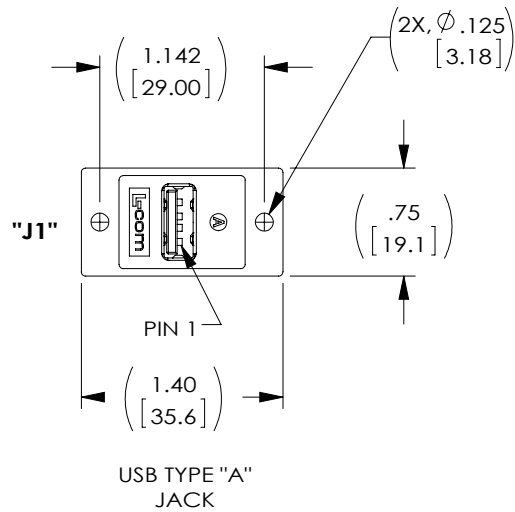

**NOTES:**

**MATERIAL:**

COUPLER HOUSING: ABS, UL94V-0.  
 CONNECTOR INSULATOR: WHITE, PBT WITH GLASS FIBER.  
 CONNECTOR CONTACTS: PHOSPHOR BRONZE.  
 CONNECTOR SHELL: BRASS.  
 PCB: EPOXY GLASS FP-4, 94V-0 FLAMMABILITY RATING.

**FINISH:**

COUPLER HOUSING: COLOR, IVORY.  
 CONNECTOR CONTACTS: GOLD, 30μ INCHES.  
 CONNECTOR SHELLS: NICKEL.

**ELECTRICAL:**

CURRENT RATING: 2 AMP MAX.  
 VOLTAGE RATING: 140 VDC.

**ENVIRONMENTAL:**

OPERATING TEMPERATURE: -10° C TO +70° C.

**MISCELLANEOUS:**

COUPLER SHALL BE TESTED FOR CONTINUITY.  
 COUPLER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC PS-0031.


**REGULATORY COMPLIANCE:**

CE2011/65/EU(RoHS DIRECTIVE)

**WIRING MAP**

"J1"

- 1 ○ — POWER (RED, 20AWG)
- 2 ○ — - DATA (WHITE, 24AWG)
- 3 ○ — + DATA (GREEN, 24AWG)
- 4 ○ — POWER GND (BLACK, 20AWG)
- GND ○ — DRAIN (GRAY, 24AWG)

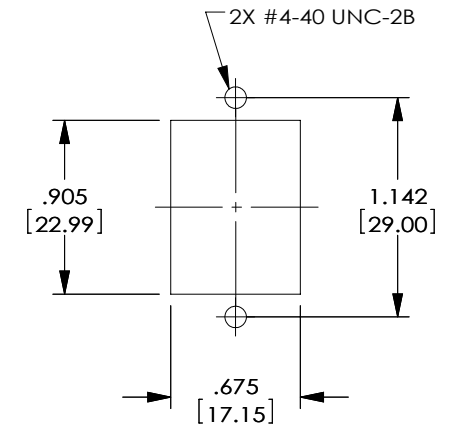

RECOMMENDED  
PANEL CUTOUT

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY C. MCCORMICK	5/4/2001	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	CHECKED BY D. PARHAM	5/4/2001	CATEGORY
	APPROVED BY R. CARRICK	5/4/2001	USB
PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION	
COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>ECJ504-UA</b>
	SCALE: NONE	CAD FILE: ECJ504-UA.SLDRW	SHEET 1 OF 1