


ReZorbTM S

MM Wave elastomer Absorber

ReZorbTM S Elastomeric Absorber Sheet

ReZorbTM S is a pure dielectric silicone absorber with no magnetic properties. Using the Laird patterning process, a shaped surface is added to greatly reduce the reflected RF signals at similar level of performance in any angle of incidence.

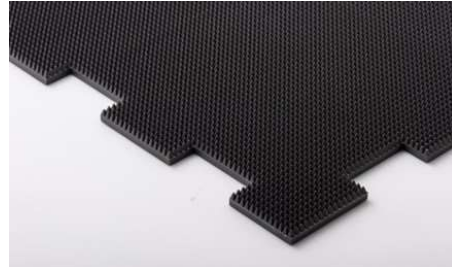

FEATURES AND BENEFITS

- High reflection reduction
- High loss
- UL 94 V0
- Flexible
- Dust Free
- High Frequency applications

MARKETS

- Datacom/Telecom
- Industrial
- Automotive
- Military/Aerospace

SPECIFICATIONS



TYPICAL PROPERTIES	DATA
Reflectivity @60-90Ghz	>-25dB
Color	Black/Dark grey
Tensile strength	255 psi
Elongation	50%
Flammability	UL94 V0
Operating Temperature	-70°C to 177°C
Standard Thicknesses (mm)	4.7 +/- 0.5 mm

APPLICATIONS

- ReZorbTM S is used around antennas to increase signal accuracy by reducing EMI through insertion loss as well as reflection reduction.
- In radar applications the side lobe of the antenna pattern can be distorted due to signal reflections on structures around the antenna. ReZorbTM S used on the bracket or structure around the antenna can greatly reduce those side lobe distortions preventing false positive and negatives.
- ReZorbTM S is an alternative to traditional foam absorber showing reliability limitation. It can be used in high frequency test box , bench test and RF laboratory equipment .
- ReZorbTM S is helping enhancing performance of high frequency mm wave scanner equipment eliminating the unwanted reflection back to the receiver.

AVAILABILITY

- Standard tiles are 200 x 200mm (8"x8") with interconnecting features to assemble large surface
- It can be supplied pre assembled with a Pressure Sensitive Adhesive
- Available die cut to drawing
- Tunable frequency range possible

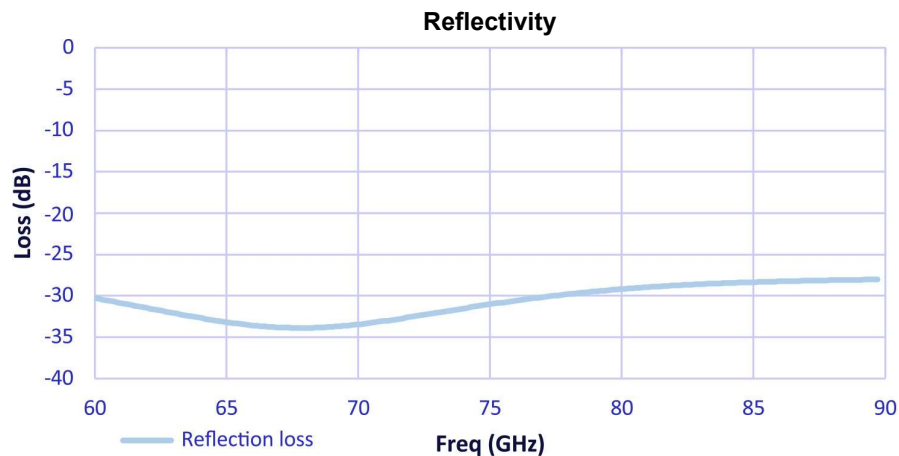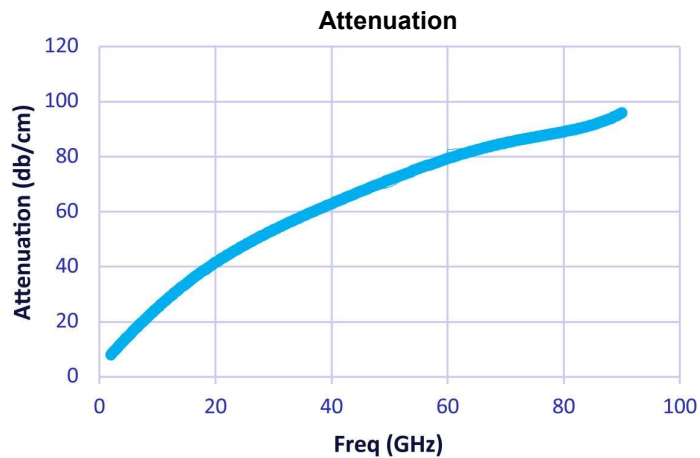

USA: +1.866.928.8181

Europe: +49.8031.24600

Asia: +86.755.2714.1166

www.laird.com



Any information furnished by Laird Technologies, Inc. or any of its affiliates or agents ("Laird") is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user. Laird makes no warranties as to the fitness, merchantability, suitability or non-infringement of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird's Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2023 Laird Technologies, Inc. All Rights Reserved. LairdTM, Laird TechnologiesTM, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. DuPontTM is a trademark or registered trademark of DuPont de Nemours, Inc. or an affiliate company thereof. Other marks may be owned by third parties. Nothing herein provides a license under any Laird or any third-party intellectual property rights.