
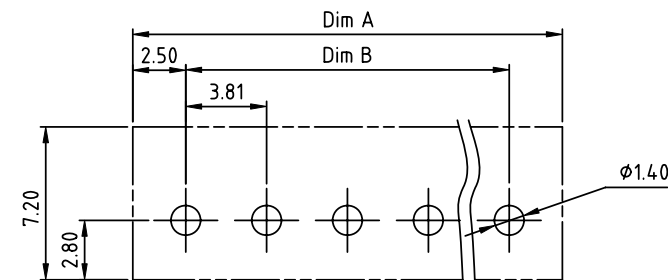
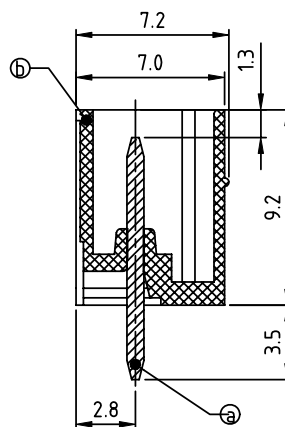
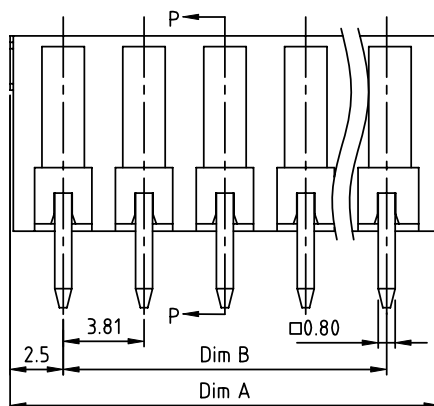


PRODUCT NUMBER	PITCH
0Qxx32x000J0G	3.81 mm

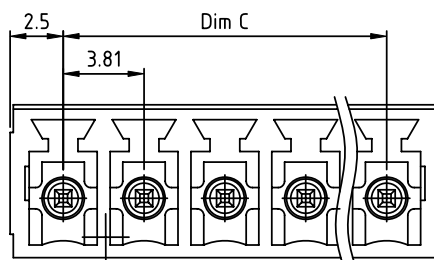

RECOMMENDED P.C.B LAYOUT
TOP VIEW

Material:

- Item ③ Male contact pin: Copper Tin plated
- Item ④ Terminal housing: Thermoplastic (UL94 V-0)

Electrical:

- Voltage rating: 300V/300V
- Current rating: 10A/10.5A
- Withstanding Voltage: 1.6 KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:



DIMENSION

Dim A	(N-1)×3.81+5.0
Dim B&C	(N-1)×3.81

N= number of poles

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.25
19P-24P	±0.30

PART NO.: 0Q xx 3 2 x 0 00J0 G

No. of poles	Body Color	RoHS compliant
02 2 poles	0 Black (RAL9005)	(lead<4%)
03 3 poles	2 Red (RAL3001/D)	In copper Alloy
...	3 Orange(RAL2011/P)	
24 24 poles	4 Yellow(RAL1018/A)	
	5 Green(RAL6018/T)	
	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	
	9 White(RAL1102)	
	C Green(RAL6018/U)	

mat'l. code				surface	tolerance	projection	product family		
ltr ecn no dr date				ASME Y14.5	ASME Y14.5		TERMINAL BLOCK		
				tolerances unless otherwise specified		MM	title		
				angles	X.±0.5		TERMINAL BLOCK		
				φ	X.X±0.3		PLUGGABLE SOCKET, VERTICAL		
				X°±1°	X.XX±0.1	scale	dwg no		
				dr	HANKE FENG 032714		sheet 1 of 1 size		
				enr	HANKE FENG 032714		0Qxx32x000J0G		
				chr	SHI JUN 032714		A4		
				appd	SHI JUN 032714		type		
							CUSTOMER Drawing		
sheet index	revision	A							
	sheet	1							