

Power distribution using uncut cables with cross-sections from 1.5 to 6 mm<sup>2</sup>.

Power supply / T-branch tap via PUSH IN connection (0.5 to 10 mm<sup>2</sup>) and/or plug-in connection (0.5 to 4 mm<sup>2</sup>).

Coloured markings provide clear assignment of wires.

- Power supply
- Power distribution
- Power branching

### General ordering data

Version	FieldPower® contact element, AC, IP20, Insulation displacement connection (IDC), PUSH IN, Number of poles : 5
Order No.	<a href="#">1269960000</a>
Type	PT6 230/BUS
GTIN (EAN)	4050118058239
Qty.	1 ST

## Technical data

### Approvals

Approvals



ROHS	Conform
UL File Number Search	<a href="#">UL Website</a>
Certificate No. (cURus)	E60693

### Dimensions and weights

Depth	54 mm	Depth (inches)	2.126 inch
Height	139.5 mm	Height (inches)	5.4921 inch
Width	61.5 mm	Width (inches)	2.4213 inch
Net weight	196 g		

### Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...55 °C
---------------------	----------------	-----------------------	----------------

### Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

### Clamping capacity

Connection data - contact element Branch / Feed-in	Wire connection method	PUSH IN	
	Blade size of operating tool	0.6 x 3.5 mm	
	Number of poles	5	
	Conductor connection cross-section, solid, max.	6 mm <sup>2</sup>	
	Conductor connection cross-section, solid, min.	0.50 mm <sup>2</sup>	
	Conductor connection cross-section, stranded, max.	6.00 mm <sup>2</sup>	
	Conductor connection cross-section, stranded, min.	0.50 mm <sup>2</sup>	
	Conductor connection cross-section, finely stranded, max.	10.00 mm <sup>2</sup>	
	Conductor connection cross-section, finely stranded, min.	0.50 mm <sup>2</sup>	
	Conductor connection cross-section, finest stranded, max.	6.00 mm <sup>2</sup>	
	Conductor connection cross-section, finest stranded, min.	0.50 mm <sup>2</sup>	
	Conductor connection cross-section with wire end ferrule	Type of wire end ferrule	12 mm with plastic collar
		Standard	DIN 46228/1
		Cross-section, min.	0.50 mm <sup>2</sup>
		Cross-section, max.	6.00 mm <sup>2</sup>
		Type of wire end ferrule	12 mm with plastic collar
		Standard	DIN 46228/4
		Cross-section, min.	0.50 mm <sup>2</sup>
		Cross-section, max.	6.00 mm <sup>2</sup>
	Type of wire end ferrule	8 mm with plastic collar	
Standard	DIN 46228/1		
Cross-section, min.	0.50 mm <sup>2</sup>		

## Technical data

		Cross-section, max.	6.00 mm <sup>2</sup>
		Type of wire end ferrule	8 mm with plastic collar ferrule
		Standard	DIN 46228/4
		Cross-section, min.	0.50 mm <sup>2</sup>
		Cross-section, max.	6.00 mm <sup>2</sup>
		Type of wire end ferrule	Twin wire-end ferrules
		Cross-section, min.	0.50 mm <sup>2</sup>
		Cross-section, max.	6.00 mm <sup>2</sup>
Connection data - contact element power bus	Wire connection method	Insulation displacement connection (IDC)	
	Blade size of operating tool	0.6 x 3.5 mm	
	Number of poles	5	
	Conductor connection cross-section, solid, max.	6 mm <sup>2</sup>	
	Conductor connection cross-section, solid, min.	1.50 mm <sup>2</sup>	
	Conductor connection cross-section, stranded, max.	6.00 mm <sup>2</sup>	
	Conductor connection cross-section, stranded, min.	2.50 mm <sup>2</sup>	
	Conductor connection cross-section, finely stranded, max.	6.00 mm <sup>2</sup>	
	Conductor connection cross-section, finely stranded, min.	2.50 mm <sup>2</sup>	
	Conductor connection cross-section, finest stranded, max.	6.00 mm <sup>2</sup>	
Conductor connection cross-section, finest stranded, min.	2.50 mm <sup>2</sup>		

## General data

Insulating material	Polyamide	Silicone	No
Colour	grey	Protection degree	IP20
UL 94 flammability rating	V-0	Can be coded	Yes
Voltage type	AC	Number of poles	5
Number of connections / pole	1	Wire connection method	Insulation displacement connection (IDC), PUSH IN
Type of connection 2	FieldPower® plug PTS 4, PTDS4		

## Rated data acc. to IEC

Rated data acc. to IEC for contact element	Voltage type	AC
	Number of phases	3
	Standard	IEC 60947-7-1, IEC 60947-7-2
	Rated voltage	800 V
	Rated impulse withstand voltage	8.00 kV
	Rated current (3 loaded poles)	41 A
	Rated current (4 loaded poles)	25 A




## Rated data acc. to UL

Rated data acc. to UL for contact element	Standard	UL 1059
	Note	for use with UL-listed TC-ER cables
	Conductor connection cross-section, AWG, max.	AWG 10
	Conductor connection cross-section, AWG, min.	AWG 14
	Rated voltage	600 V
	Rated current	30 A

**Technical data****Classifications**

ETIM 6.0	EC002498	ETIM 7.0	EC002498
ETIM 8.0	EC002498	ETIM 9.0	EC002498
ETIM 10.0	EC002498	ECLASS 9.0	27-14-25-90
ECLASS 9.1	27-14-25-90	ECLASS 10.0	27-14-25-90
ECLASS 11.0	27-14-25-90	ECLASS 12.0	27-14-25-90
ECLASS 13.0	27-14-25-90	ECLASS 14.0	27-14-25-90
ECLASS 15.0	27-14-25-90		

Drawings

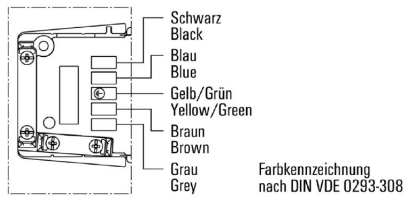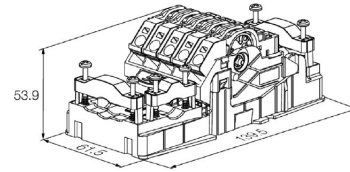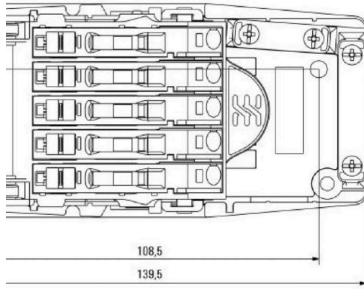


## PT6 230/BUS

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

### Coding elements



Through the use of coding pins, individual coding options ensure trouble-free plug-in connection.

### General ordering data

Type	KOSF ZT2.5	Version	
Order No.	<a href="#">1816150000</a>	Version	Z-series, Coding element, yellow, 2.9 mm
GTIN (EAN)	4032248370726		
Qty.	50 ST		

### Plug-in connector



Power distribution using uncut cables with cross-sections from 1.5 to 6 mm<sup>2</sup>.  
 Power supply / T-branch tap via PUSH IN connection (0.5 to 10 mm<sup>2</sup>) and/or plug-in connection (0.5 to 4 mm<sup>2</sup>).  
 Coloured markings provide clear assignment of wires.


- Power supply
- Power distribution
- Power branching

### General ordering data

Type	PTS 4 MPB	Version	
Order No.	<a href="#">1010910000</a>	Version	Field Power® plug-in connector, IP20, Polyamide, PUSH IN, Number of poles : 5
GTIN (EAN)	4032248717330		
Qty.	10 ST		
Type	PTDS 4 NE	Version	
Order No.	<a href="#">2000240000</a>	Version	Field Power® plug-in connector, IP20, Polyamide, PUSH IN, Number of poles : 2 x 5
GTIN (EAN)	4050118387520		
Qty.	10 ST		

## Accessories

### Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

### General ordering data

Type	WS 12/6 MC NE WS	Version
Order No.	<a href="#">1609900000</a>	WS, Terminal marker, 12 x 6 mm, Pitch in mm (P): 6.00 Weidmueller,
GTIN (EAN)	4008190203467	Allen-Bradley, white
Qty.	600 ST	

### Tools



Sheathing stripper for PVC cables

### General ordering data

Type	AM 16	Version
Order No.	<a href="#">9204190000</a>	Tools, Sheathing strippers
GTIN (EAN)	4032248608133	
Qty.	1 ST	
Type	AM 25	Version
Order No.	<a href="#">9001540000</a>	Tools, Sheathing strippers
GTIN (EAN)	4008190138271	
Qty.	1 ST	


## PT6 230/BUS

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

## Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

## General ordering data

Type	SDS 0.6X3.5X100	Version	
Order No.	<a href="#">2749340000</a>	Screwdriver, Blade width (B): 3.5 mm, Blade length: 100 mm, Blade thickness (A): 0.6 mm	
GTIN (EAN)	4050118895568		
Qty.	1 ST		

## Crosshead screwdriver Pozidriv



Crosshead screwdriver, Pozidriv, SDK PZ DIN 5262, ISO 8764/2-PZ, output to ISO 8764/1-PZ, ChromTop tip, SoftFinish grip

## General ordering data

Type	SDK PZ2 X 100	Version	
Order No.	<a href="#">2749450000</a>	Screwdriver, Blade width (B): 2 mm, 100 mm, Blade thickness (A):	
GTIN (EAN)	4050118895674		
Qty.	1 ST		

## Strain relief



Extensive range of accessories for the FieldPower® boxes. Cable seals, terminal rails, locking elements and much more.

## General ordering data

Type	ZE PTSC 3X27 PT6	Version	
Order No.	<a href="#">2370760000</a>	Strain relief, Polyamide 66, Strain relief for energy bus of PT6 contact element, For 15 - 17 mm cable diameter	
GTIN (EAN)	4032248991075		
Qty.	100 ST		

## Accessories

Type	ZE SE PTSC 3X27 PT6	Version
Order No.	<a href="#">2370770000</a>	Strain relief, Polyamide 66, Strain relief for side entry of PT6 contact
GTIN (EAN)	4032248991082	element, For 15 - 17 mm cable diameter
Qty.	100 ST	