

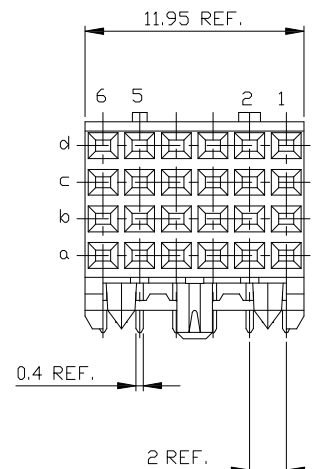


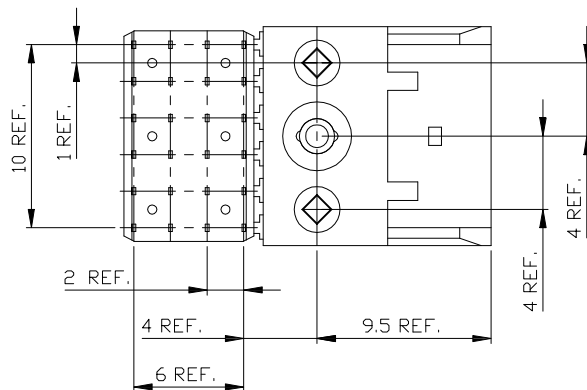


All rights strictly reserved. Reproduction or issue in any form without written authority from the proprietor.
Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
© FCI NV

PC BOARD VERSIONS		
PRODUCTNR	PCB THICKNESS	DIM'A"
89035-X01	1.6	2.90
89035-X11	2.4	3.53
89035-X01LF	1.6	2.90
89035-X11LF	2.4	3.53

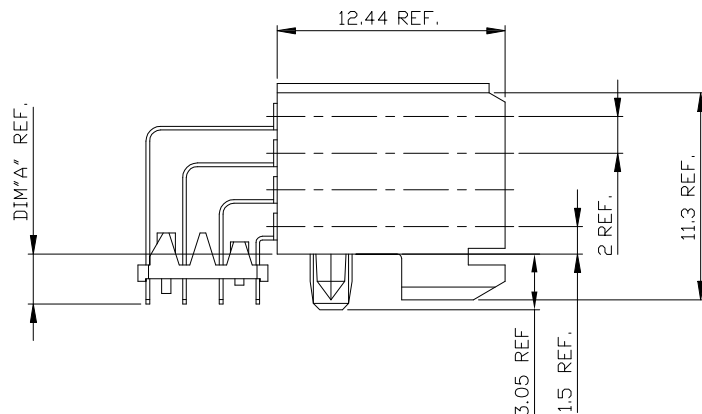

PRODUCT AFTER PC BOARD APPLICATION.

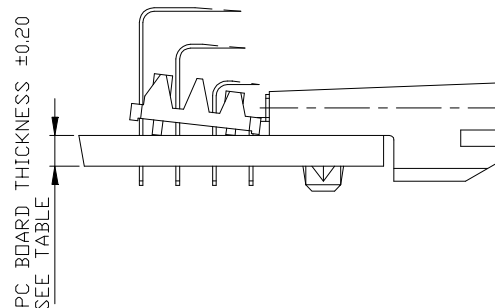


PC BOARD THICKNESS ±0.20
SEE TABLE

NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 PLATING SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um PURE Sn
FOR LEAD FREE.
- 4 INDICATED HOLES ARE UNPLATED.
- 5 PRODUCT MARKING: PARTNUMBER & BATCH ID.
- 6 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-22-008.
- 7 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK
TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER
APPLICATION.

PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

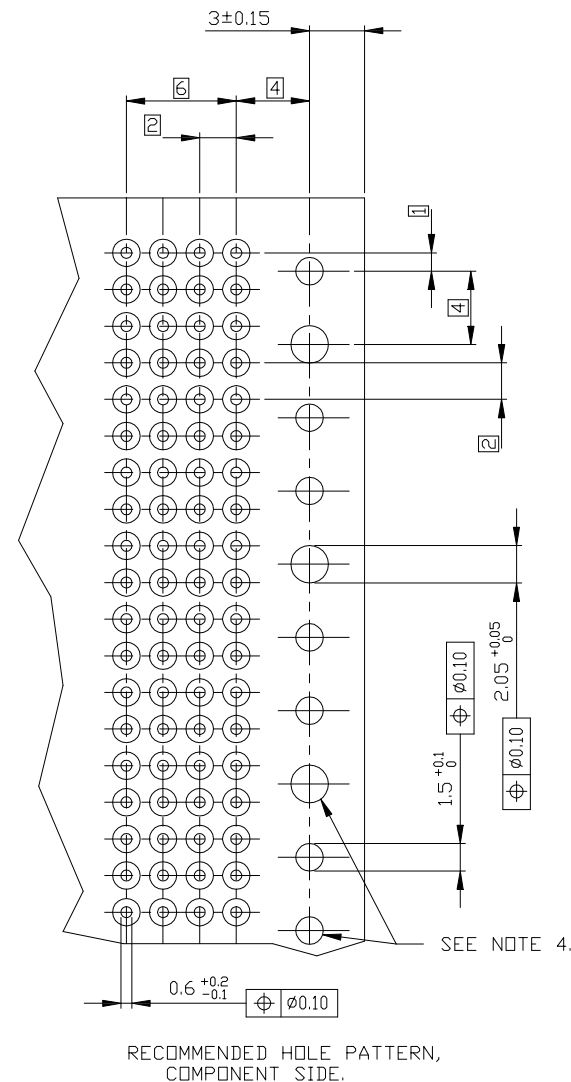

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.





SEE NOTE 4.

mat'l. code			tolerances unless otherwise specified		CUSTOMER COPY		FCI	
l	tr	ec	n	odr	date	linear	projection	title
H	0004	0104	Clu		041220			RA FEMALE SIGNAL
J	0006	0478	Cenh		11/23/06			12 mm PRESS PEG
K	0007	0171	Cenh		05/25/07	angles		
L	0008	0171	TER	8/26/08	dir	H.Bouwknecht	921216	product family METAL(tn)
M	SG09	0068	Cenh	06/06/09	engr	H. Bouwknecht	940311	code
G	V00847	LLA	000530		chr	P.Schalk	921222	213
sheet	revision	M	M	M	app	J.Vintjes	921222	sheet
Index	sheet	1	2	3				1 of 3




All rights strictly reserved. Reproduction or issue in any form without written authority from the proprietor.
Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
Property of FCI S.A.
© FCI S.A.

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
89035-X02	1.6	2.90
89035-X12	2.4	3.53
89035-X02LF	1.6	2.90
89035-X12LF	2.4	3.53

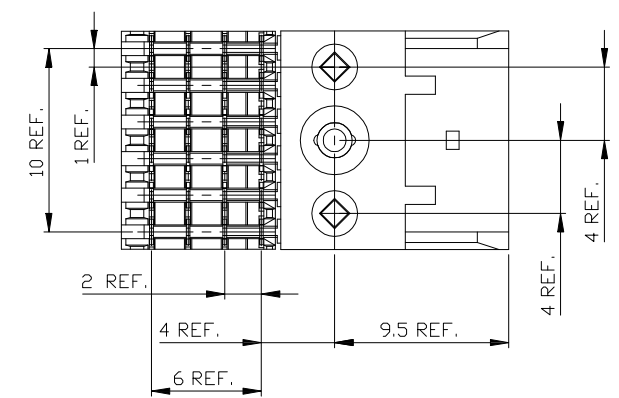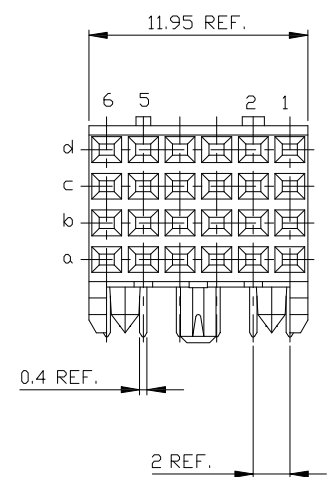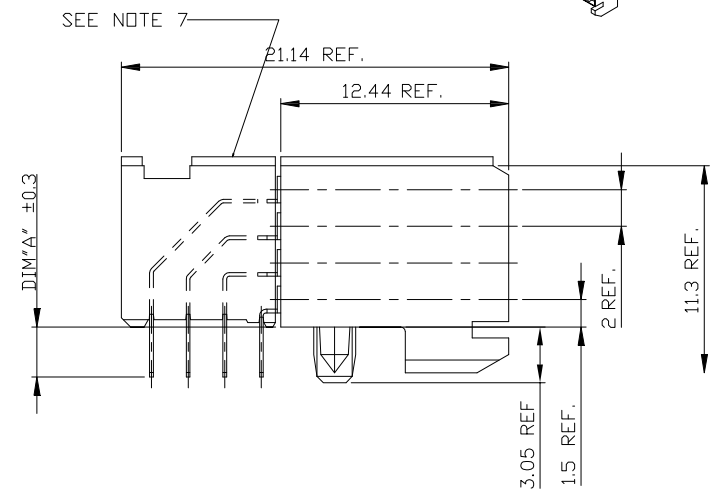


PRODUCT AFTER PC BOARD APPLICATION.

PC BOARD THICKNESS ±0.20
SEE TABLE



14.64 REF. SEE NOTE 6

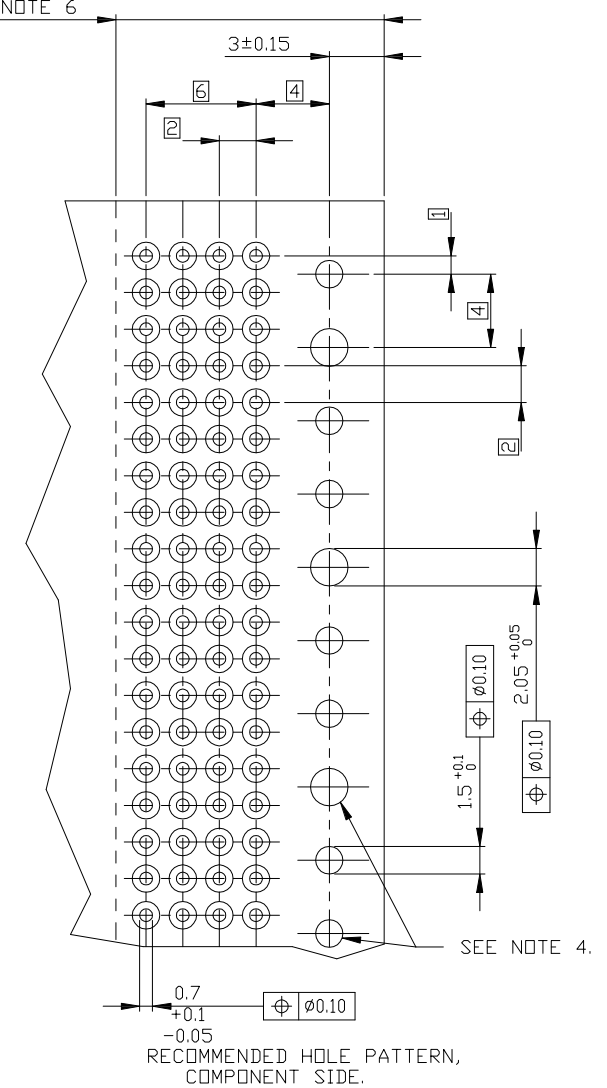

- NOTES:
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 PLATING SOLDER TAILS 2-8 μ m SnPb 90-97 OR 2-8 μ m PURE Sn
 - 4 INDICATED HOLES ARE UNPLATED.
 - 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
 - 6 SET BACK FOR PRESS BLOCK.
 - 7 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
 - 8 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - 9 THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

PLATING CONTACT AREA:




DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

mat'l code		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
l	tr	ec	n	dr	date	linear	projection
M						angles	mm
dr	D. de Bil	970529					
engr	P. Schalk	970529					
chr	P. Schalk	970529					
app	H. Coolmans	970529					
sheet	revision						
index	sheet						
title		product family		code		size	
RA FEMALE SIGNAL		METAL (tm)		213		2 of 2	
12 mm PRESS PEG		A2		89035			





All rights strictly reserved. Reproduction or issue in any form without written authority from the proprietor.
Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
FCI S.A. - 13000 MARSEILLE Cedex 09 - FRANCE
© FCI S.A.

PC BOARD VERSIONS		
PRODUCTNR.	PCB THICKNESS	DIM "A"
89035-X03	1.6	2.90
89035-X13	2.4	3.53
89035-X03LF	1.6	2.90
89035-X13LF	2.4	3.53

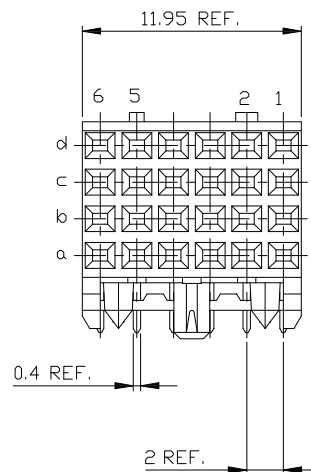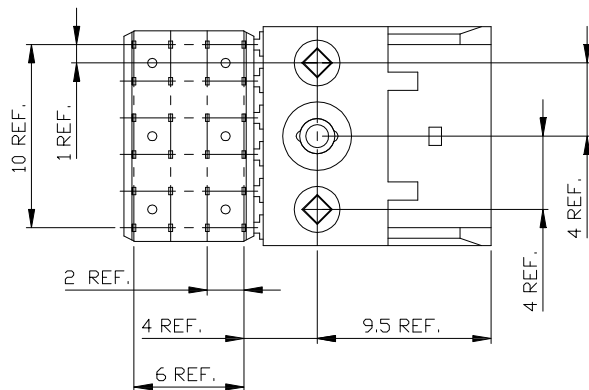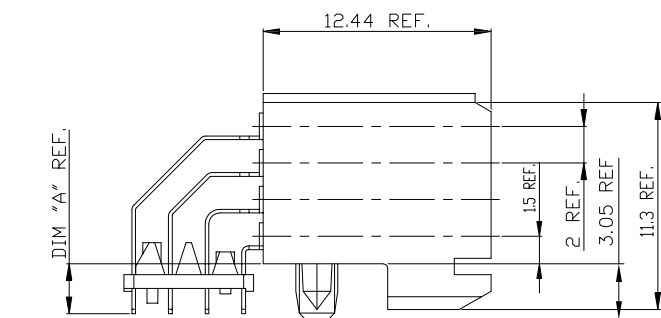

PRODUCT AFTER PC BOARD APPLICATION.

PC BOARD THICKNESS ± 0.20
SEE TABLE

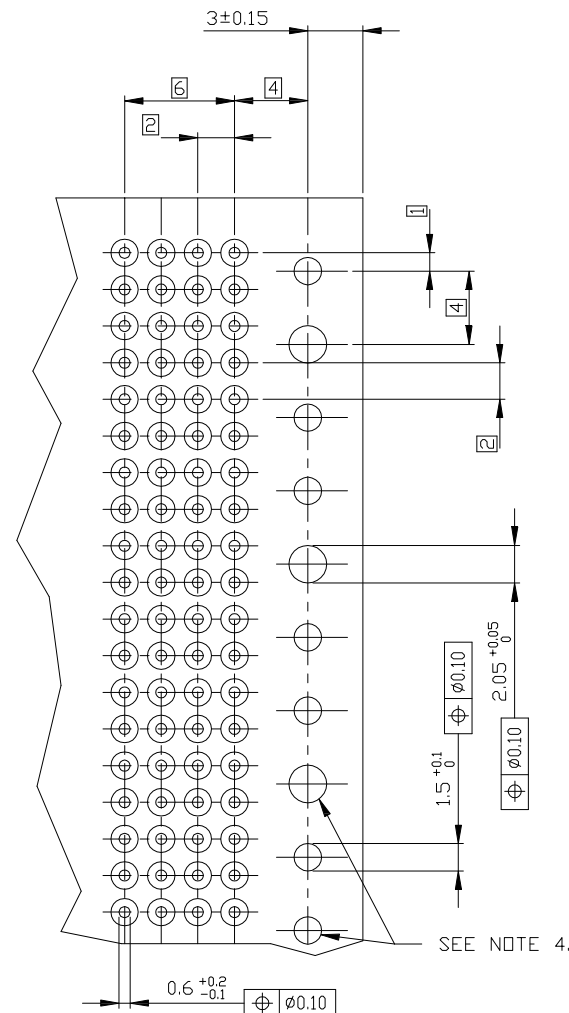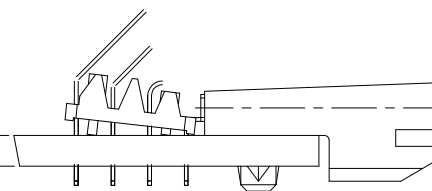

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

NOTES:

- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- TERMINAL MATERIAL: PHOSPHOR BRONZE.
- PLATING SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um PURE Sn FOR LEAD FREE.
- INDICATED HOLES ARE UNPLATED.
- PRODUCT MARKING: PARTNUMBER & BATCH ID.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCI	
l	tr	ec	n	dr	date	linear	projection
M						angles	mm
dr	Heaven Cen	11/23/06					
engr	Collins Lu	11/23/06					
chr	Beer Fu	11/23/06					
app	Joseph Hsia	11/23/06					
sheet	revision						
index	sheet						
title		product family		code		size	
RA FEMALE SIGNAL		METRAL(tm)		213		3 of 3	
12 mm PRESS PEG		A2		89035			
scale		5:1					