

# Product datasheet

Specifications



## Signal Conditioner, Harmony Analog, 6.2 mm, universal V or I

RMC1UUBD

EAN Code: 3606487614135

### Main

Range of product	Harmony Analog
Product or component type	Signal conditioner
Analogue input type	Current 0...20 mA Current 4...20 mA Voltage 0...10 V DC Voltage 2...10 V DC Voltage 0...5 V DC Voltage 1...5 V DC
Analogue output type	Current 0...20 mA $\leq$ 550 Ohm Current 4...20 mA $\leq$ 550 Ohm Voltage 0...10 V $\geq$ 10 kOhm Voltage 2...10 V $\geq$ 10 kOhm Voltage 0...5 V $\geq$ 10 kOhm Voltage 1...5 V $\geq$ 10 kOhm

### Complementary

Protection type	Reverse polarity protection on power supply Overvoltage protection on output Short-circuit protection on output
[Us] rated supply voltage	24 V DC +30 %...-25 %, isolated
Current consumption	$\leq$ 40 mA for 24 V
Measurement error	+/- 0.1 % of full scale
Repeat accuracy	+/- 0.03 %
Temperature coefficient	$<$ 100 ppm/ $^{\circ}$ C
Clamping connection capacity	20...14 AWG
tightening torque	0.4...0.5 N.m 0.4...0.5 N.m
Marking	CULus DNV CE UKCA WEEE China RoHS
IP degree of protection	IP20
Surge withstand	1 kV during 1.2/50 $\mu$ s conforming to IEC 61000-4-5
[Ui] rated insulation voltage	300 V
Fixing mode	Clip-on (35 mm DIN rail)
Safety reliability data	MTTFd = 300.3 years B10d = 277144
Product weight	0.07 kg
Wire stripping length	8...9 mm

<b>Status LED</b>	3 LEDs (green) PWR (Power Status) (red) high signal level (red) low signal level
<b>Overvoltage category</b>	II
<b>Operating altitude</b>	0...2000 m
<b>Width</b>	6.2 mm
<b>Height</b>	110 mm
<b>Depth</b>	110 mm
<b>Relative humidity</b>	5...95 %

## Environment

<b>Product certifications</b>	cULus DNV
<b>Shock resistance</b>	50 gn for 11 ms conforming to IEC 60068-2-27
<b>Vibration resistance</b>	5 gn (f= 10...150 Hz) conforming to IEC 60068-2-6
<b>Resistance to electrostatic discharge</b>	6 kV (in contact) conforming to IEC 61000-4-2 8 kV (in air) conforming to IEC 61000-4-2
<b>Ambient air temperature for storage</b>	-40...85 °C
<b>Ambient air temperature for operation</b>	-40...70 °C mounting side by side
<b>Pollution degree</b>	2 conforming to IEC 60664-1
<b>Electromagnetic emission</b>	Conducted emissions conforming to CISPR 11 Radiated emissions conforming to CISPR 11
<b>Dielectric strength</b>	3 kV AC between the inputs and the supply circuit between the outputs and the supply circuit between input and output
<b>Electromagnetic compatibility</b>	Fast transient bursts - test level: 1 kV criteria A (I/O) conforming to IEC 61000-4-4 Fast transient bursts - test level: 2 kV criteria A (power lines) conforming to IEC 61000-4-4 Radiated RF field immunity test - test level: 10 V/m, 80 MHz...1 GHz criteria A conforming to IEC 61000-4-3 Radiated RF field immunity test - test level: 3 V/m, 1.4...6 GHz criteria A conforming to IEC 61000-4-3 Conducted radio-frequency immunity test - test level: 10 V, 0.15...80 MHz criteria A conforming to IEC 61000-4-6 Magnetic field at power frequency - test level: 30 A/m criteria A conforming to IEC 61000-4-8

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	2.200 cm
<b>Package 1 Width</b>	11.800 cm
<b>Package 1 Length</b>	12.000 cm
<b>Package 1 Weight</b>	102.000 g
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	30
<b>Package 2 Height</b>	15.000 cm
<b>Package 2 Width</b>	30.000 cm
<b>Package 2 Length</b>	40.000 cm

---

Package 2 Weight	3.479 kg
------------------	----------

## Contractual warranty

---

Warranty (in months)	18
----------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	24 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	4 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.2 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	19 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.1 kg CO2 eq.

## Use Better



### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	<a href="#">Compliant By Exemption</a>
REACH Regulation	<a href="#">Reference contains Substances of Very High Concern above the threshold</a>
PVC free	Yes
Silicone-free	Yes

## Use Longer



### Lifetime extension

Repair	No
--------	----

## Use Again




### Repack and remanufacture

Recyclability potential, in %	62
End of life manual availability	<a href="#">End of Life Information</a>

Dimensions Drawings

Dimensions


---

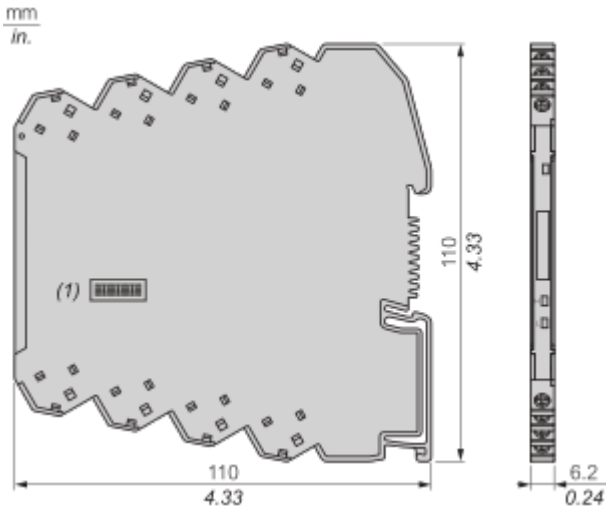

1 : DIP switch for configuration

Mounting and Clearance

Mounting & Installation

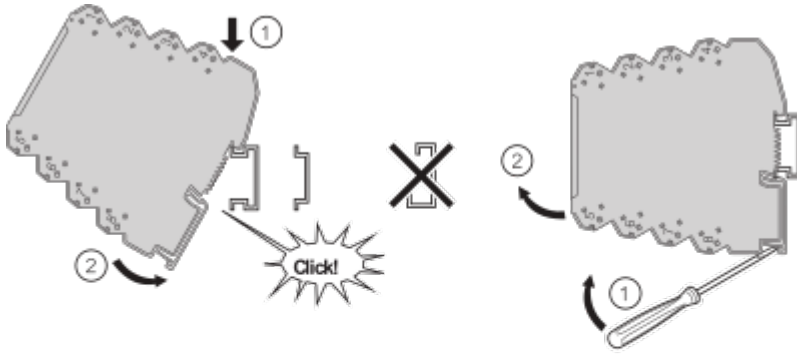

mm	8...9		
inch	0.31...0.35		
mm <sup>2</sup>		0.5...2.5	0.5...2.5
AWG		20...14	20...14


Rail 35 mm / 1.38 in –  
 Rail 35 mm / 1.38 in –  
 Schiene 35 mm / 1.38 in –  
 Riel 35 mm / 1.38 in –  
 Guida 35 mm / 1.38 in –  
 轨道 35 mm / 1.38 in –

} IEC/EN 60715

	Ø 3.5 mm/ 0.14 in		N.m	0.4...0.5
			lbf.in	3.5...4.4

Connections and Schema

Connection Example

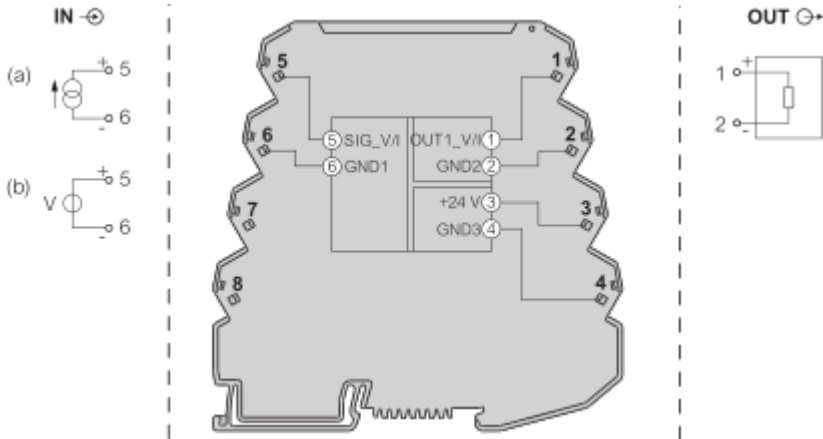


- (a) : Current Source
- (b) : Voltage Source

Technical Illustration

Dimensions

---

Connection Example / Exemple de raccordement / Anschlussbeispiel / Ejemplo de conexión / Esempio di collegamento / 连接示例

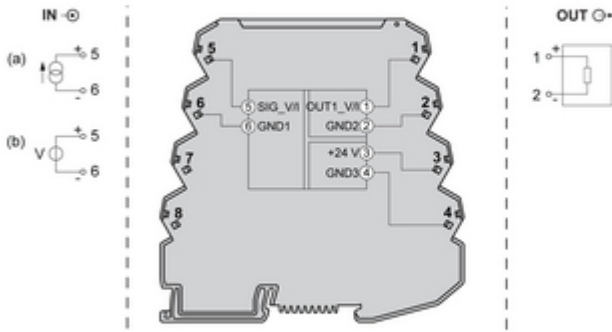

(a) Current Source / Source de courant / Stromquelle / Fuente de corriente / Sorgente di corrente / 电流源  
(b) Voltage Source / Source de tension / Spannungsquelle / Fuente de tensión / Sorgente di tensione / 电压源

Image of product / Alternate images

Alternative

---

