

Modular Terminal Blocks with Fixing Flange or Snap-in Mounting Foot, Series 262

Side-entry

0.08 – 4 mm²
630 V/8 kV/3 ①
24 A

AWG 28 – 12
300/600 V, 20/5 A ②
300/600 V, 20/5 A ③

Terminal block width 7 mm / 0.276 in
9 – 10 mm / 0.37 in

* VDE IEC CCA CE GL BV LR NV

2 x 0.08 – 4 mm²
630 V/8 kV/3 ①
32 A


2 x AWG 28 – 12
300/600 V, 20/5 A ②
300/600 V, 20/5 A ③

Terminal block width 12 mm / 0.472 in
9 – 10 mm / 0.37 in

* VDE IEC CCA CE GL BV LR NV

① 630 V = rated voltage
8 kV = rated surge voltage
3 = pollution degree
(see also section 10)

② Suitable for EEx i applications

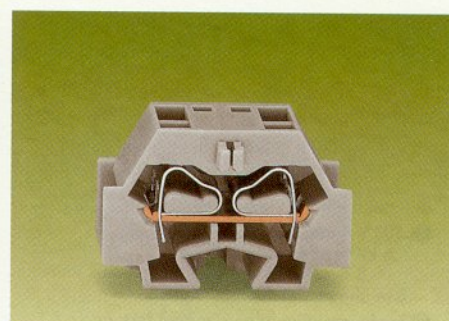

Description	Color	Item-No.	Pack.-unit pcs	Color	Item-No.	Pack.-unit pcs
	Terminal blocks with fixing flange , for screw fixing or similar methods, fixing hole diameter 3.2 mm (with mounting adapter 209-123 also for DIN 35 rail)			4-conductor terminal blocks		
	grey	262-301	100 (2 x 50)	grey	262-331	100 (2 x 50)
	blue	262-304 ①	100 (2 x 50)	blue	262-334 ①	100 (2 x 50)
	orange	262-306	100 (2 x 50)	orange	262-336	100 (2 x 50)
	2-conductor terminal blocks			4-conductor terminal blocks		
	grey	262-311	100 (2 x 50)	grey	262-341	100 (2 x 50)
	blue	262-314 ①	100 (2 x 50)	blue	262-344 ①	100 (2 x 50)
	orange	262-316	100 (2 x 50)	orange	262-346	100 (2 x 50)
	End terminal block ③, without fixing foot, for terminal strips with snap-in mounting feet (see dimensioned drawings on page 1.25.)			4-conductor terminal blocks		
	grey	262-321	100 (2 x 50)	grey	262-351	100 (2 x 50)
	blue	262-324 ①	100 (2 x 50)	blue	262-354 ①	100 (2 x 50)
	orange	262-326	100 (2 x 50)	orange	262-356	100 (2 x 50)
	green-yellow	262-327	100 (2 x 50)	green-yellow	262-357	100 (2 x 50)

Accessories for modular terminal blocks and terminal strips (Marking accessories see section 9.)

	End plate with fixing flange	grey	262-361	50	grey	262-361	50
	End plate with snap-in mounting foot	grey	262-371	50	grey	262-371	50
	Comb type jumper bar , insulated, 2-way	I _N 16 A grey reduce wire to 2.5 mm ² /AWG 14 max.	262-402	25	I _N 16 A grey reduce wire to 2.5 mm ² /AWG 14 max.	262-402	25
	Operating tool , insulated, for connecting the comb type jumper bar	2-way	209-132	1	2-way	209-132	1
	Aluminum carrier rail , 1000 x 18 x 7 mm 3'3" x 0.709 x 0.276 in		210-154	1		210-154	1
	Plastic end stop , with WSB marking facility, for aluminum rail 210-154	6 mm / 0.236 in wide grey	209-122	25	6 mm / 0.236 in wide grey	209-122	25
	Mounting adapter , for terminal blocks with snap-in mounting foot, for DIN 35 rail	6 mm / 0.236 in wide grey	209-120	25	6 mm / 0.236 in wide grey	209-120	25
	Mounting adapter with screw , for terminal blocks with fixing flange, for DIN 35 rail	6 mm / 0.236 in wide grey	209-123	25	6 mm / 0.236 in wide grey	209-123	25
	Mounting adapter for DIN 35 rail, can be used as end stop	6.5 mm / 0.256 in wide grey	209-137	25	6.5 mm / 0.256 in wide grey	209-137	25

* For further approvals with corresponding ratings see pages 10.3 ff.